

Valvola di sfiato a doppio effetto a bagno d'olio enologico, curva a 90°

art. 43

Double action relief valve with 90° elbow



Unter und Überdruckventil in Ölbad getaucht mit 90° Bogen

Soupape à double effet en acier inox en bain d'huile oenologique coudée 90°

Válvula de desaire en baño de aceite enológico con codo 90°

AISI 304 - 316

ART.	DN	A	I	H	PORTATA RANGE
43A6	60	60,3	170	270	50 m ³ /h
43A7	70	76,1	170	290	50 m ³ /h
43A8	80	88,9	220	320	100 m ³ /h
43A10	100	101,6	220	320	100 m ³ /h

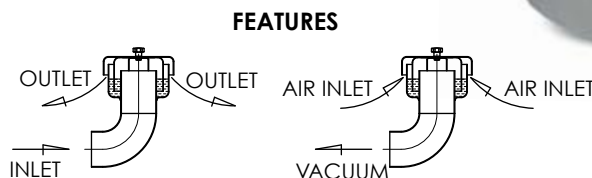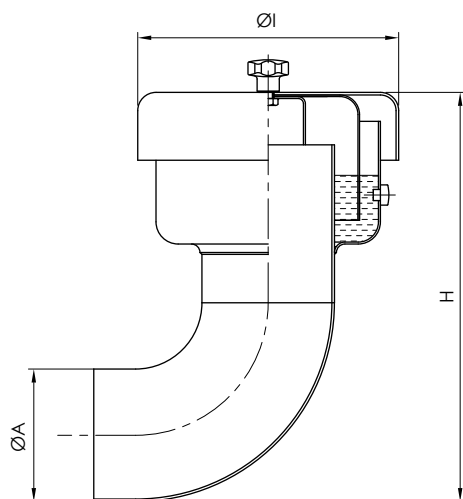

Ver. 04.18

Valvola a doppio effetto adatta per tenuta azoto

art. 44A

Double action relief valve proper for nitrogen estate



Unter und Überdruckventil, Stickstoffdicht

Soupape à double effet en inox apte à tenue azote

Válvula de desaire con tenido por nitrógeno

AISI 304 - 316

ART.	DN	A	B	C	D	E	PORTATA RANGE	TARATURA in bar SETTING in bar
44A1	40	54	42	100	213	80	20 m ³ /h	-0.002 / +0.04
44A2	50	54	50	100	213	80	30 m ³ /h	-0.002 / +0.04
44A3	80	83	85	135	290	110	50 m ³ /h	-0.002 / +0.04
44A4	100	104	104	145	320	125	80 m ³ /h	-0.002 / +0.04

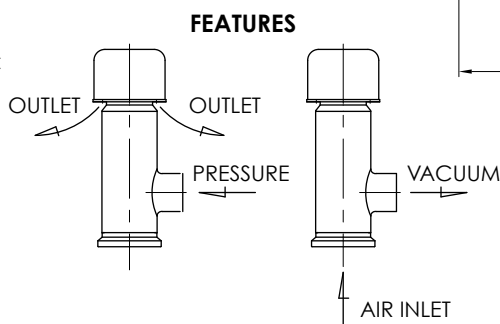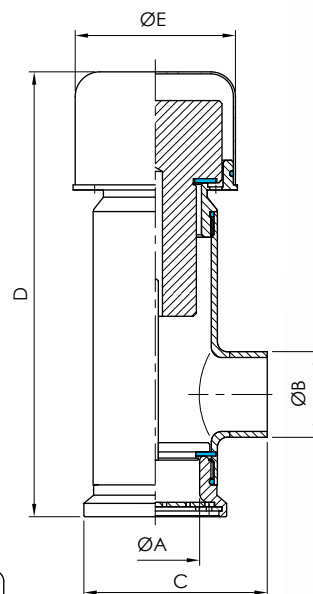

SPECIFICHE TECNICHE:

- Corpo e testa in AISI 304 - 316
- Tenuta in silicone
- Pressione di apertura: 0.04 bar
- Depressione di apertura: -0.002 bar
- Scarto di chiusura: ≤ 20%
- Temperatura di esercizio: -20°C / +80°C
- Connessioni: DIN/SMS/Clamp

TECHNICAL SPECIFICATIONS:

- Body and head in AISI 304 - 316
- Seal in silicon
- Opening pressure: 0.04 bar
- Vacuum opening pressure: -0.002 bar
- Closure gap: ≤ 20%
- Working temperature: -20°C / +80°C
- Connections: DIN/SMS/Clamp