

Valvola di ritegno a saldare

Welded Check valve
Rückschlagventil S/S
Clapet anti-rétour à souder
Vàlvula de retencion S/S

 art. **46G**


ART.	DN	A	B	C	D
46 G - 1	25	26	26	64	87
46 G - 2	32	32	32	66	93
46 G - 3	40	38	38	72	98
46 G - 4	50	50	50	72	111
46 G - 5	65	66	66	80	128
46 G - 6	80	81	81	100	143
46 G - 7	100	100	100	104	164

SPECIFICHE TECNICHE:

- Corpo in AISI 316 - AISI 304
- Tenuta in EPDM
- Pressione di apertura 0.2 bar
- Pressione max di esercizio 10 bar
- Temperatura di esercizio -50°C / +100°C

TECHNICAL SPECIFICATIONS:

- Body in AISI 316 - AISI 304
- Seal in EPDM
- Opening pressure 0.2 bar
- Max working pressure 10 bar
- Working temperature -50°C / +100°C

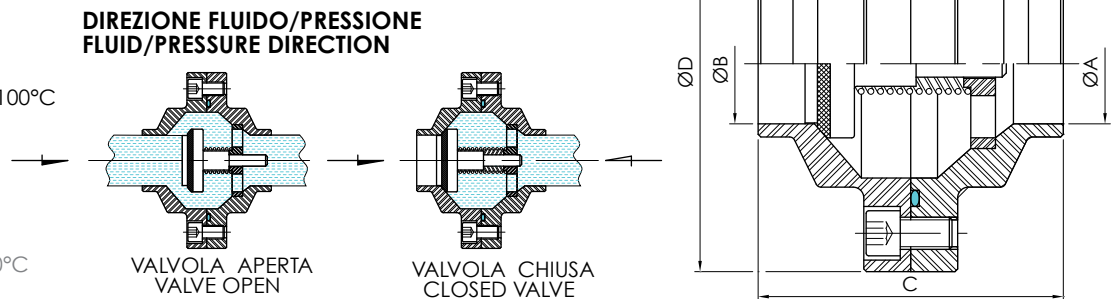

Ver. 04.18

Valvola di ritegno a saldare/Fem. DIN 11851

Welded/Threaded Check valve
Rückschlagventil S/G
Clapet anti-rétour soud./nez fil. DIN
Vàlvula de retencion S/M

 art. **46H**

ART.	DN	A	B	C	D
46 H - 1	25	52x1/6"	26	64	87
46 H - 2	32	58x1/6"	32	66	93
46 H - 3	40	65x1/6"	38	72	98
46 H - 4	50	78x1/6"	50	72	111
46 H - 5	65	95x1/6"	66	80	128
46 H - 6	80	110x1/4"	81	100	143
46 H - 7	100	130x1/4"	100	104	164

SPECIFICHE TECNICHE:

- Corpo in AISI 316 - AISI 304
- Tenuta in EPDM
- Pressione di apertura 0.2 bar
- Pressione max di esercizio 10 bar
- Temperatura di esercizio -50°C / +100°C

TECHNICAL SPECIFICATIONS:

- Body in AISI 316 - AISI 304
- Seal in EPDM
- Opening pressure 0.2 bar
- Max working pressure 10 bar
- Working temperature -50°C / +100°C

